

RIGOL



DSG800 Series

RF Signal Generator

Highly cost-effective economical RF signal generator

- Up to -105 dBc/Hz (typical) phase noise
- Up to +20 dBm (typical) maximum output power
- Higher level of amplitude accuracy, up to 0.5 dB (typical)
- Superb signal stability

Functions almost matching those of high-level RF signal generators

- Flexible frequency and amplitude sweep functions
- Complete AM/FM/ØM analog modulation functions
- Standard LF output function
- Powerful pulse modulation function
- System flatness calibration function
- Simple and easy to operate

Special design ensuring its reliability and durability

- Use electronic attenuator to avoid wearing
- Specially designed protection functions
- Digital ALC circuit
- Simple structure

Smallest in size among the like products

- Occupy the least workbench space
- Occupy less rack space
- Light weight; the handle offers comfortable grip

RIGOL TECHNOLOGIES, INC.



► Specifications

The technical specifications are valid when the instrument is within the calibration period, is stored for at least two hours in 0°C to 50°C temperature and is warmed up for 40 minutes. Unless otherwise noted, the specifications in this manual include the measurement uncertainty.

Typical Value (typ.): the typical performance that 80 percent of the measurement results can meet at room temperature (approximately 25°C). This data is not warranted and does not include the measurement uncertainty.

Nominal Value (nom.): the expected average performance or the designed performance attribute, such as the 50 Ω connector. This data is not warranted and is measured at room temperature (approximately 25°C).

Measured Value (meas.): the performance attribute measured during the design phase used to be compared with the expected performance, such as the variation of the amplitude drift with time. This data is not warranted and is measured at room temperature (approximately 25°C).

Note: Unless otherwise noted, all the values in this manual are the measurement results of multiple instruments at room temperature.

Frequency

Frequency		
	DSG815	DSG830
Frequency range	9 kHz to 1.5 GHz	9 kHz to 3 GHz
Frequency resolution	0.01 Hz	
Setting time ^[1]	< 10 ms (typ.)	

Frequency Band		
Band	Frequency range	N ^[2]
1	f < 227.5 MHz	0.25
2	227.5 MHz ≤ f < 455 MHz	0.125
3	455 MHz ≤ f < 910 MHz	0.25
4	910 MHz ≤ f < 1820 MHz	0.5
5	1820 MHz ≤ f ≤ 3000 MHz	1


Internal Reference Frequency		
Reference frequency	10 MHz	
Temperature stability	In temperature range 0°C to 50°C , reference to 25°C	< 2 ppm
	With option OCXO-B08	< 5 ppb
Aging rate		< 1 ppm/year
	With option OCXO-B08	< 30 ppb/year
Internal reference frequency output	Frequency	10 MHz
	Level	+5 dBm to +10 dBm
External reference frequency input	Frequency	10 MHz
	Level	0 dBm to +10 dBm
	Maximum deviation	±5 ppm

Frequency Sweep		
Sweep type	Step sweep (equally or logarithmically spaced frequency steps) List sweep (list with arbitrary frequency steps)	
Sweep mode	Single, continuous	
Sweep range	Full frequency range	
Sweep shape	Triangle, ramp	
Step change	Linear or logarithmic	
Number of points	Step sweep	2 to 65535
	List sweep	1 to 6001
Dwell time	20 ms to 100 s	
Trigger mode	Auto, key, external, bus (USB, LAN)	


Spectral Purity

		DSG815	DSG830
Harmonic	CW mode, $1 \text{ MHz} \leq f \leq 3 \text{ GHz}$, level $\leq +13 \text{ dBm}$	< -30 dBc	
Non-harmonic	CW mode, level $> -10 \text{ dBm}$, carrier offset $> 10 \text{ kHz}$		
	$100 \text{ kHz} \leq f \leq 1.5 \text{ GHz}$	< -60 dBc, < -70 dBc (typ.)	< -60 dBc, < -70 dBc (typ.)
	$1.5 \text{ GHz} < f \leq 3 \text{ GHz}$		< -54 dBc, < -64 dBc (typ.)
SSB phase noise	CW mode, carrier offset = 20 kHz, 1 Hz measurement bandwidth		
	$100 \text{ kHz} \leq f \leq 1.5 \text{ GHz}$	< -100 dBc/Hz, < -105 dBc/Hz (typ.)	< -100 dBc/Hz, < -105 dBc/Hz (typ.)
	$1.5 \text{ GHz} < f \leq 3 \text{ GHz}$		< -94 dBc/Hz, < -99 dBc/Hz (typ.)
Residual FM	CW mode, RMS value at $f = 1 \text{ GHz}$		
	0.3 kHz to 3 kHz	< 10 Hz rms, < 5 Hz rms (typ.)	
	0.03 kHz to 20 kHz	< 50 Hz rms, < 10 Hz rms (typ.)	

Measured at 0 dBm, harmonics vs.frequency

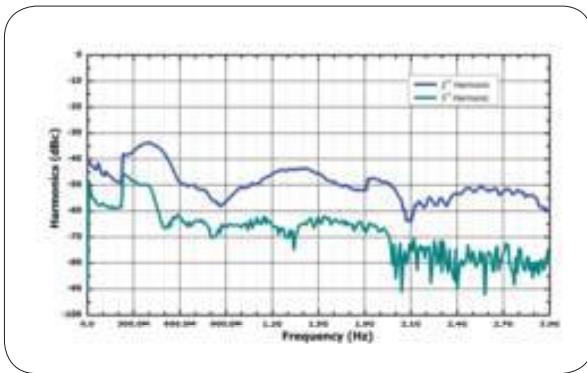

Measured SSB phase noise

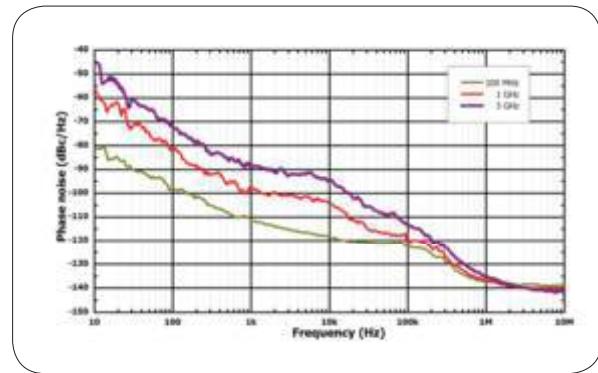

Note:

[1] Time from receipt of SCPI command or trigger signal to within 0.1 ppm of final frequency (final frequency $\geq 227.5 \text{ MHz}$) or within 100 Hz (final frequency $< 227.5 \text{ MHz}$).

[2] N is a factor used to help define certain specifications within the manual.

Amplitude

Setting Range			
		Specification level range	Setting range
Maximum output level ^[1]	9 kHz ≤ f < 100 kHz		+5 dBm
	100 kHz ≤ f ≤ 3 GHz	+13 dBm	+20 dBm
Minimum output level	9 kHz ≤ f ≤ 100 kHz		-110 dBm
	100 kHz < f ≤ 3 GHz	-110 dBm	-110 dBm
Setting Resolution	0.01 dB		
Absolute Level Uncertainty			
Level uncertainty	Temperature range: 20°C to 30°C		
		+13 dBm to -60 dBm	-60 dBm to -110 dBm
	100 kHz ≤ f ≤ 3 GHz	≤ 0.9 dB, ≤ 0.5 (typ.)	≤ 1.1 dB, ≤ 0.7 (typ.)
VSWR ^[2]	1 MHz ≤ f ≤ 3 GHz	< 1.8 (typ.)	
Level Setting			
Setting time ^[3]	Fixed frequency, temperature range: 20°C to 30°C		≤ 5 ms (typ.)
Max. Reverse Power			
Max. reverse power	Max. DC voltage	50 V	
	1 MHz < f ≤ 3 GHz	1 W	
Level Sweep			
Sweep type	Step sweep (equally spaced level steps) List sweep (list with arbitrary level steps)		
Sweep mode	Single, continuous		
Sweep range	Full level range		
Sweep shape	Triangle, ramp		
Step change	Linear		
Number of points	Step sweep	2 to 65535	
	List sweep	1 to 6001	
Dwell time	20 ms to 100 s		
Trigger mode	Auto, key, external, bus (USB, LAN)		
Maximum and minimum level vs. frequency		Measured maximum level vs. frequency	


Note:

[1] Typical maximum output level up to +20 dBm (± 1 dB) when output frequency ≥ 10 MHz.


[2] In 50 Ω measurement system, typical value, output level ≤ -10 dBm.

[3] Time from receipt of SCPI command or trigger signal to within 0.1 dB of final level.


Measured at +13 dBm,level error vs.frequency

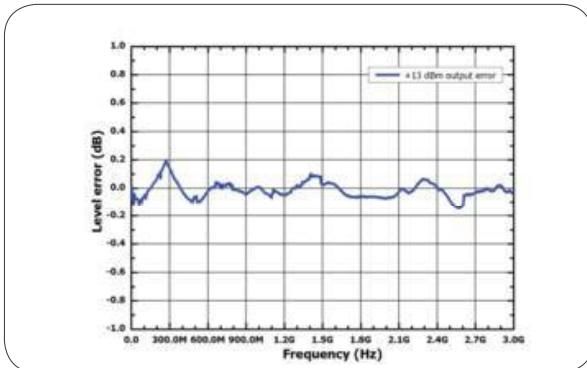


Measured at 0 dBm,level error vs.frequency

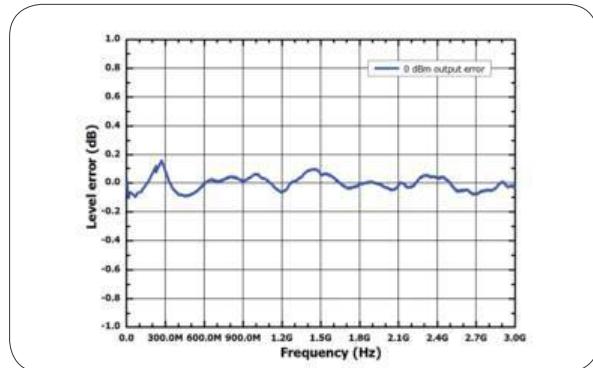


Measured at -20 dBm,level error vs.frequency

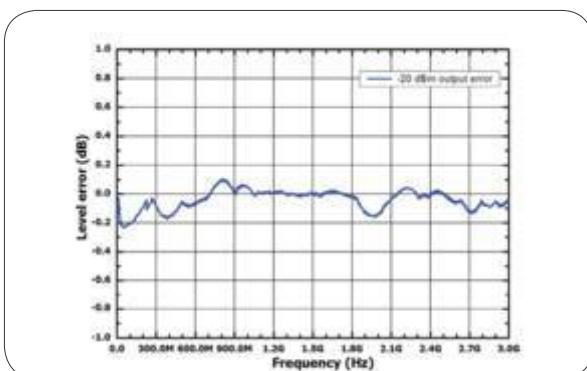


Measured at -60 dBm,level error vs.frequency

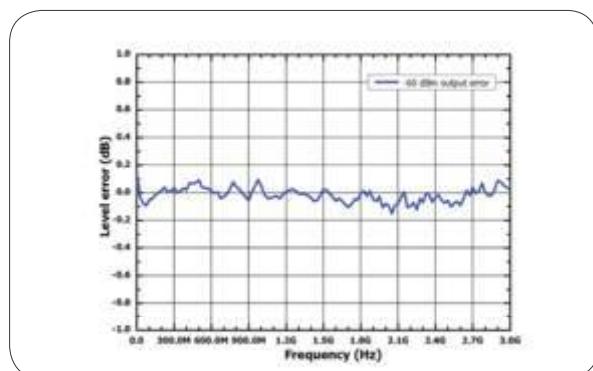


Measured at -90 dBm,level error vs.frequency

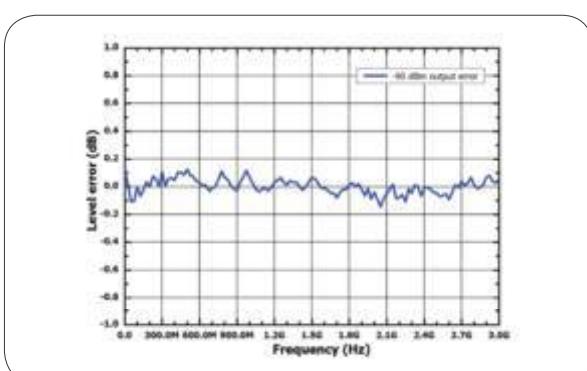


Measured at -110 dBm,level error vs.frequency

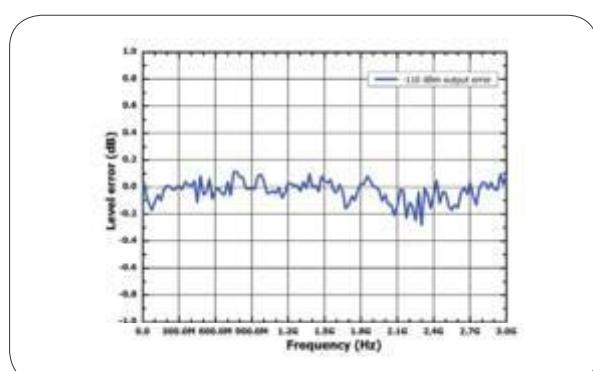

Measured VSWR vs.frequency

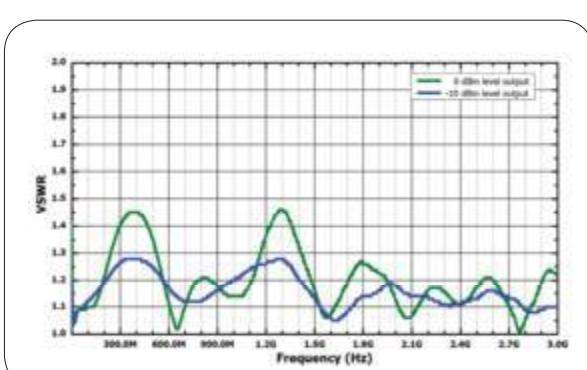

Measured level repeatability @ 1 GHz,0 dBm

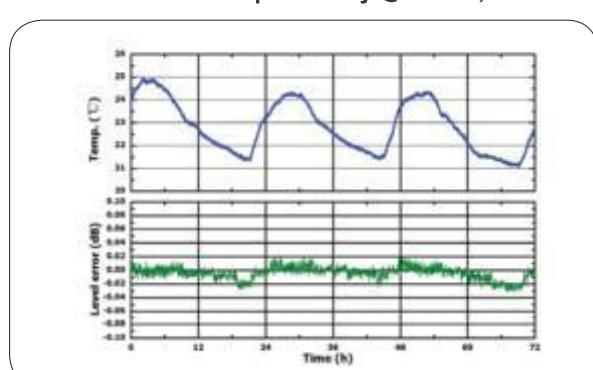

Internal Modulation Generator (LF)

Internal Modulation Generator (LF)		
Waveform	Sine, square	
Frequency range	Sine	DC to 200 kHz
	Square	DC to 20 kHz
Resolution	0.01 Hz	
Frequency error	The same with that of the RF reference source	
Voltage range	AC	0 to 3 V _p
	DC	-3 V to 3 V
Voltage resolution	2 mV	

Modulation^[1]

Simultaneous Modulation				
	AM	FM	ØM	Pulse mod. (opt.)
AM	-	○	○	△
FM	○	-	×	○
ØM	○	×	-	○
Pulse mod. (opt.)	△	○	○	-

Note: ○: compatible; ×: not compatible; △ : compatible, but the AM performance will decrease when pulse modulation is turned on.

Amplitude Modulation

Modulation source	Internal, external
Modulation depth ^[2]	0% to 100%
Resolution	0.1%
Setting uncertainty	$f_{mod} = 1 \text{ kHz}$
Distortion	$f_{mod} = 1 \text{ kHz}, m < 30\%, \text{level} = 0 \text{ dBm}$
Modulation frequency response	$m < 80\%, \text{DC}/10 \text{ Hz to } 100 \text{ kHz}$

Frequency Modulation

Modulation source	Internal, external
Max. deviation	$N \times 1 \text{ MHz}$ (nom.)
Resolution	< 0.1% of the deviation or 1 Hz, take the greater one (nom.)
Setting uncertainty	$f_{mod} = 1 \text{ kHz}$, internal modulation
Distortion	$f_{mod} = 1 \text{ kHz}$, deviation = $N \times 50 \text{ kHz}$
Modulation frequency response ^[3]	DC/10 Hz to 100 kHz

Phase Modulation

Modulation source	Internal, external
Max. deviation	$N \times 5 \text{ rad}$ (nom.)
Resolution	< 0.1% of the deviation or 0.01 rad, take the greater one (nom.)
Setting uncertainty	$f_{mod} = 1 \text{ kHz}$, internal modulation
Distortion	$f_{mod} = 1 \text{ kHz}$, deviation = $N \times 5 \text{ rad}$
Modulation frequency response ^[4]	DC/10 Hz to 100 kHz

Pulse Modulation (Option DSG800-PUM)


Modulation source	External, internal	
On/off ratio	100 kHz $\leq f < 3$ GHz	> 70 dB
Rise/fall time (10%/90%)	< 50 ns, 10 ns (typ.)	
Pulse repetition frequency	DC to 1 MHz	

Pulse Generator (Option DSG800-PUM)

Pulse mode	Single pulse, pulse train (option DSG800-PUG)	
Pulse period	Setting range	40 ns to 170 s
	Resolution	10 ns
Pulse width	Setting range	10 ns to (170 s - 10 ns)
	Resolution	10 ns
Trigger delay	Setting range	10 ns to 170 s
	Resolution	10 ns
Trigger mode	Auto, external trigger, external gate, key, bus (USB, LAN)	

Pulse Train Generator (Option DSG800-PUG)

Pulse train generator	Number of pulse patterns	1 to 2047
	On/off time range	20 ns to 170 s
	Number of repetitions per pattern	1 to 256

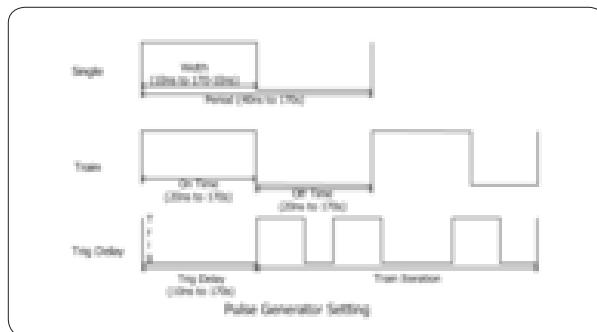

Note:

- [1] Unless otherwise noted, the modulation source is sine. The temperature range is from 20°C to 30°C , carrier frequency ≥ 1 MHz.
- [2] The envelop peak power is no greater than the maximum value of the specification output range.
- [3] External modulation, measured at 100 kHz deviation.
- [4] External modulation, measured at 5 rad deviation.

Input and Output

Front Panel Connectors		
RF output	Impedance	50 Ω (nom.)
	Connector	N female
Internal modulation generator (LF) output	Impedance	50 Ω (nom.)
	Connector	BNC female

Rear Panel Connectors		
External trigger input	Impedance	1 kΩ (nom.)
	Connector	BNC female
Signal valid output	Trigger voltage	3.3 V TTL level
	Connector	BNC female
Pulse input or output	Output voltage	0 V/3.3 V (nom.)
	Impedance	50 Ω (nom.)
External modulating signal input	Input/output voltage	0 V/3.3 V (nom.)
	Impedance	100 kΩ/600 Ω/50 Ω (nom.)
	Coupling	AC/DC
	Sensitivity	1 V peak-peak for indicated modulation depth or deviation (nom.)
	Connector	BNC female
	Impedance	50 Ω (nom.)
10MHz input (external frequency reference input)	Connector	BNC female
	Impedance	50 Ω (nom.)
10MHz output (external frequency reference output)	Connector	BNC female
	Impedance	50 Ω (nom.)

Rear Panel Communication Interfaces		
USB host	Connector	A plug
	Protocol	Version 2.0
USB device	Connector	B plug
	Protocol	Version 2.0
LAN	LXI Core 2011 Device	10/100Base, RJ-45

General Specifications

Display		
Type	TFT LCD	
Resolution	320 (RGB) × 240	
Size	3.5 inches	
Mass Storage		
Mass storage	Flash non-volatile memory (internal); USB storage device (not supplied)	
Data storage space	Flash non-volatile memory (internal)	96 MB (nom.)
Power Supply		
Input voltage range, AC	100 V to 240 V (nom.)	
AC frequency range	45 Hz to 440 Hz	
Power consumption	With all the options	50 W (typ.), max. 60 W

Electromagnetic Compatibility and Safety		
Certificate of conformity	CE cTUVus EAC	
	Conform to EN61326-1:2013	
	IEC 61000-4-2:2008	±4.0 kV (contact discharge), ±8.0 kV (air discharge)
	IEC 61000-4-3:2006+A1+A2	3 V/m (80 MHz to 1 GHz) 3 V/m (1.4 GHz to 2 GHz) 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004+A1	1 kV power cable
EMC	IEC 61000-4-5:2005	0.5 kV (Phase to Neutral) 0.5 kV (Phase to PE) 1 kV (Neutral to PE)
	IEC 61000-4-6:2008	3 V, 0.15-80 MHz
	IEC 61000-4-8:2009	3 A/m (50 Hz, 60 Hz)
	IEC 61000-4-11:2004	Voltage dip: 0% UT during half cycle 0% UT during 1 cycle 70% UT during 25 cycles Short interruption: 0% UT during 250 cycles
Safety regulation	Conform to: UL 61010-1:2012 CAN/CSA-C22.2 No. 61010-1-12 EN 61010-1:2010	

Environmental		
Temperature	Operating temperature range	0°C to 50°C
	Storage temperature range	-20°C to 70°C
Humidity	0°C to 30°C	≤ 95% rel. humidity
	30°C to 40°C	≤ 75% rel. humidity
	40°C to 50°C	≤ 45% rel. humidity
Altitude	Operating height	Below 3,000m

Dimensions		
(W × H × D)	261.5 mm × 112 mm × 318.4 mm (10.30 inch × 4.41 inch × 12.54 inch)	

Weight		
	4.2 kg (9.3 lb)	

Calibration Interval		
Recommended calibration interval	1 year	

► Ordering Information

	Description	Order Number
Models	RF Signal Generator, 9 kHz to 1.5 GHz	DSG815
	RF Signal Generator, 9 kHz to 3 GHz	DSG830
Standard Accessories	Quick Guide (Hard Copy)	--
	CDROM (User's Guide, Programming Guide)	--
	Power Cable	--
Options	Pulse Modulation, Pulse Generator	DSG800-PUM
	Pulse Train Generator ^[1]	DSG800-PUG
	High Stable Reference Clock	OCXO-B08
	Rack Mount Kit (For one Instrument)	RM-1-DG1000Z
	Rack Mount Kit (For two Instruments)	RM-2-DG1000Z

Note: [1] The option DSG800-PUM will be installed automatically after this option is installed.

RIGOL

HEADQUARTER

RIGOL TECHNOLOGIES, INC.
No.156,Cai He Village,
Sha He Town,
Chang Ping District, Beijing,
102206 P.R.China
Tel:+86-10-80706688
Fax:+86-10-80705070
Electronic Measurement
Instrument service and support
email:EMD_support@rigol.com
Chemical Analysis Instrument
service and support email:service.
chem@rigol.com

EUROPE

RIGOL TECHNOLOGIES GmbH
Lindbergh str. 4
82178 Puchheim
Germany
Tel: 0049- 89/89418950
Email: info-europe@rigoltech.com

NORTH AMERICA

RIGOL TECHNOLOGIES,
USA INC.
10200 SW Allen Blvd, Suite C
Beaverton, OR 97005, USA
Toll free: 877-4-RIGOL-1
Office: (440) 232-4488
Fax: (216)-754-8107
Email: info@rigol.com

JAPAN

RIGOL TECHNOLOGIES JAPAN G.K.
Tonematsu Bldg. 5F, 2-33-8 Nihonbashi-
Ningyocho, Chuo-ku,
Tokyo 103-0013
Japan
Tel: +81-3-6264-9251
Fax: +81-3-6264-9252
Email: info-japan@rigol.com

RIGOL® is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** office or access **RIGOL** official website: www.rigol.com

